




TECHNICAL SHEET FA 20 102 20

Guided Type Fall Arrester on Kernmantle Rope, 20 m

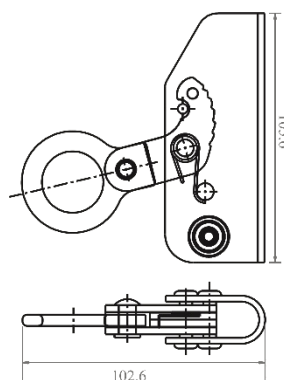

- Works on 12 mm diam. Polyester Kernmantle rope.
- The rope grab is incorporated permanently on its anchorage line and comes with an energy absorber.
- The sewing is protected with a strong transparent covering sleeve, which protects the end and also makes the stitches visible for easy inspection before the use.
- Minimum breaking strength > 15 kN.

Connectors: 1 steel screw-locking karabiner opening 18 mm for connection on a harness.

Compliance: EN353-2:2002.

Material of components:

Rope Grab: Stainless steel

Rope: Polyester

Shock Absorber: Polyester and Polyamide

Length:	CE	Weight:
20 m		2.80 kg

KRATOS SAFETY

689 Chemin du Buclay
38540 Heyrieux – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

83081010

CARTON SIZE / PCS.

80 x 40 x 24 cm / 05

AET N°5598 Issue 1 Extension 1

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering
Northamptonshire, NN16 8SD, United Kingdom

ARTICLE 11 GB07/73551

SGS United Kingdom Ltd., N°0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom